






AC





2CSA4005R0001



2CSA4005R0001



2CSA4005R0001



DDA 200 AC type

Function: RCD-block for assembly on site with MCBs S 200 series. Protection against the effects of sinusoidal alternating earth fault currents; protection against indirect contacts and additional protection against direct (with $I_{\Delta n}=30$ mA) contacts.

Application: residential, commercial, industrial.

Standard: IEC/EN 61009 Ann. G

Number of poles	Nominal fault current $I_{\Delta n}$ mA	Nominal current I_n A	Order details Type code	Order code	Bbn 8012542 EAN	Price 1 piece	Price group	Weight 1 piece kg	Pack unit pc.
2	10	25	DDA202 AC-25/0.012	2CSB202001R0250	791003			0.200	1
		30	DDA202 AC-25/0.032	2CSB202001R1250	791102			0.200	1
		40	DDA202 AC-40/0.032	2CSB202001R1400	791201			0.200	1
		63 ②	DDA202 AC-63/0.032	2CSB202001R1630	791300			0.200	1
	100	25	DDA202 AC-25/0.1	2CSB202001R2250	791409			0.200	1
		40	DDA202 AC-40/0.1	2CSB202001R2400	791508			0.200	1
		63 ②	DDA202 AC-63/0.1	2CSB202001R2630	791607			0.200	1
	300	25	DDA202 AC-25/0.3	2CSB202001R3250	791706			0.200	1
		40	DDA202 AC-40/0.3	2CSB202001R3400	791805			0.200	1
		63 ②	DDA202 AC-63/0.3	2CSB202001R3630	791904			0.200	1
	500	25	DDA202 AC-25/0.5	2CSB202001R4250	790200			0.200	1
		40	DDA202 AC-40/0.5	2CSB202001R4400	792109			0.200	1
		63 ②	DDA202 AC-63/0.5	2CSB202001R4630	792208			0.200	1
3	100	25	DDA202 AC-25/1	2CSB202001R5250	808305			0.200	1
		40	DDA202 AC-40/1	2CSB202001R5400	808404			0.200	1
		63 ②	DDA202 AC-63/1	2CSB202001R5630	792307			0.200	1
	30	25	DDA203 AC-25/0.032	2CSB203001R1250	792505			0.200	1
		40	DDA203 AC-40/0.032	2CSB203001R1400	792604			0.200	1
		63 ②	DDA203 AC-63/0.032	2CSB203001R1630	792703			0.350	1
	100	25	DDA203 AC-25/0.1	2CSB203001R2250	792802			0.200	1
		40	DDA203 AC-40/0.1	2CSB203001R2400	792901			0.200	1
		63 ②	DDA203 AC-63/0.1	2CSB203001R2630	793007			0.350	1
	300	25	DDA203 AC-25/0.3	2CSB203001R3250	793106			0.200	1
		40	DDA203 AC-40/0.3	2CSB203001R3400	793205			0.200	1
		63 ②	DDA203 AC-63/0.3	2CSB203001R3630	793304			0.350	1
4	500	25	DDA203 AC-25/0.5	2CSB203001R4250	793403			0.200	1
		40	DDA203 AC-40/0.5	2CSB203001R4400	793502			0.200	1
		63 ②	DDA203 AC-63/0.5	2CSB203001R4630	793601			0.350	1
	1000	25	DDA203 AC-25/1	2CSB203001R5250	808503			0.200	1
		40	DDA203 AC-40/1	2CSB203001R5400	808602			0.200	1
		63 ②	DDA203 AC-63/1	2CSB203001R5630	793700			0.350	1
	30	25	DDA204 AC-25/0.032	2CSB204001R1250	793908			0.200	1
		40	DDA204 AC-40/0.032	2CSB204001R1400	794004			0.200	1
		63 ① ②	DDA204 AC-63/0.032	2CSB204001R1630	794103			0.350	1
	100	25	DDA204 AC-25/0.1	2CSB204001R2250	794202			0.200	1
		40	DDA204 AC-40/0.1	2CSB204001R2400	794301			0.200	1
		63 ②	DDA204 AC-63/0.1	2CSB204001R2630	794400			0.350	1
	300	25	DDA204 AC-25/0.3	2CSB204001R3250	794509			0.200	1
		40	DDA204 AC-40/0.3	2CSB204001R3400	794608			0.200	1
		63 ②	DDA204 AC-63/0.3	2CSB204001R3630	794707			0.350	1
	500	25	DDA204 AC-25/0.5	2CSB204001R4250	794806			0.200	1
		40	DDA204 AC-40/0.5	2CSB204001R4400	794905			0.200	1
		63 ②	DDA204 AC-63/0.5	2CSB204001R4630	795001			0.350	1
	1000	25	DDA204 AC-25/1	2CSB204001R5250	808701			0.200	1
		40	DDA204 AC-40/1	2CSB204001R5400	808800			0.200	1
		63 ②	DDA204 AC-63/1	2CSB204001R5630	795100			0.350	1

① version with test button working at 115VAC - 127VAC is available on request
② provided with additional terminals for remote tripping


A

DDA 200 A type

Function: RCD-block for assembly on site with MCBs S 200 series. Protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contacts and additional protection against direct (with $I_{\Delta n}=30$ mA) contacts.

Application: residential, commercial, industrial.

Standard: IEC/EN 61009 Ann. G

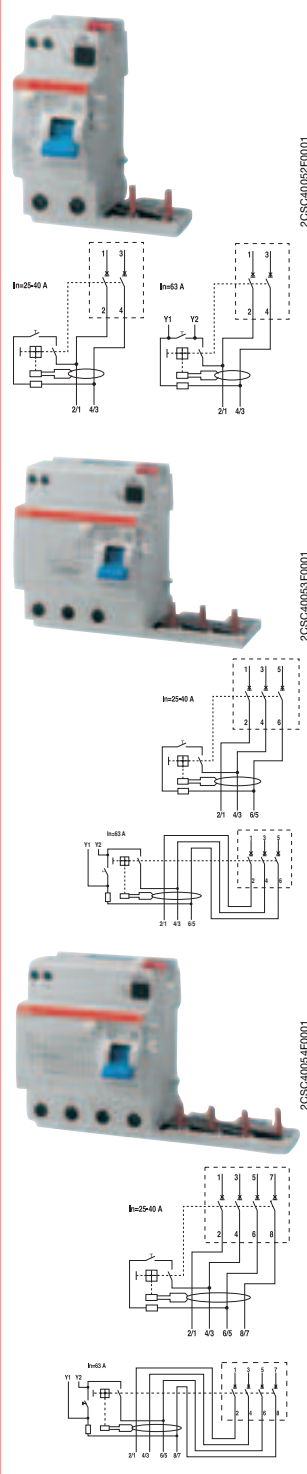

Number of poles	Nominal fault current $I_{\Delta n}$ mA	Nominal current I_n A	Order details		Bbn 8012542	Price 1 piece	Price group	Weight 1 piece kg	Pack unit pc.
			Type code	Order code	EAN				
2	10	25	DDA202 A-25/0.01	2CSB202101R0250	795308			0.200	1
	30	25	DDA202 A-25/0.03	2CSB202101R1250	795407			0.200	1
		40	DDA202 A-40/0.03	2CSB202101R1400	795506			0.200	1
		63 ③	DDA202 A-63/0.03	2CSB202101R1630	795605			0.200	1
	100	25	DDA202 A-25/0.1	2CSB202101R2250	795704			0.200	1
		40	DDA202 A-40/0.1	2CSB202101R2400	795803			0.200	1
		63 ③	DDA202 A-63/0.1	2CSB202101R2630	795902			0.200	1
	300	25	DDA202 A-25/0.3	2CSB202101R3250	796008			0.200	1
		40	DDA202 A-40/0.3	2CSB202101R3400	796107			0.200	1
		63 ③	DDA202 A-63/0.3	2CSB202101R3630	796206			0.200	1
	500	25	DDA202 A-25/0.5	2CSB202101R4250	796305			0.200	1
		40	DDA202 A-40/0.5	2CSB202101R4400	796404			0.200	1
3		63 ③	DDA202 A-63/0.5	2CSB202101R4630	796503			0.200	1
	1000	25	DDA202 A-25/1	2CSB202101R5250	808909			0.200	1
		40	DDA202 A-40/1	2CSB202101R5400	809005			0.200	1
		63 ③	DDA202 A-63/1	2CSB202101R5630	796602			0.200	1
	30	25 ①	DDA203 A-25/0.03	2CSB203101R1250	796701			0.200	1
		40 ①	DDA203 A-40/0.03	2CSB203101R1400	796800			0.200	1
		63 ③	DDA203 A-63/0.03	2CSB203101R1630	796909			0.350	1
	100	25	DDA203 A-25/0.1	2CSB203101R2250	797005			0.200	1
		40	DDA203 A-40/0.1	2CSB203101R2400	797104			0.200	1
		63 ③	DDA203 A-63/0.1	2CSB203101R2630	797203			0.350	1
	300	25 ①	DDA203 A-25/0.3	2CSB203101R3250	797302			0.200	1
		40 ①	DDA203 A-40/0.3	2CSB203101R3400	797401			0.200	1
4		63 ③	DDA203 A-63/0.3	2CSB203101R3630	797500			0.350	1
	500	25	DDA203 A-25/0.5	2CSB203101R4250	797609			0.200	1
		40	DDA203 A-40/0.5	2CSB203101R4400	797708			0.200	1
		63 ③	DDA203 A-63/0.5	2CSB203101R4630	797807			0.350	1
	1000	25	DDA203 A-25/1	2CSB203101R5250	809104			0.200	1
		40	DDA203 A-40/1	2CSB203101R5400	809203			0.200	1
		63 ③	DDA203 A-63/1	2CSB203101R5630	797906			0.350	1
	30	25 ①	DDA204 A-25/0.03	2CSB204101R1250	798002			0.200	1
		40 ①	DDA204 A-40/0.03	2CSB204101R1400	798101			0.200	1
		63 ② ③	DDA204 A-63/0.03	2CSB204101R1630	798200			0.350	1
	100	25	DDA204 A-25/0.1	2CSB204101R2250	798309			0.200	1
		40	DDA204 A-40/0.1	2CSB204101R2400	798408			0.200	1
		63 ③	DDA204 A-63/0.1	2CSB204101R2630	798507			0.350	1
	300	25 ①	DDA204 A-25/0.3	2CSB204101R3250	798606			0.200	1
		40 ①	DDA204 A-40/0.3	2CSB204101R3400	798705			0.200	1
		63 ③	DDA204 A-63/0.3	2CSB204101R3630	798804			0.350	1
	500	25	DDA204 A-25/0.5	2CSB204101R4250	798903			0.200	1
		40	DDA204 A-40/0.5	2CSB204101R4400	799009			0.200	1
		63 ③	DDA204 A-63/0.5	2CSB204101R4630	799108			0.350	1
	1000	25	DDA204 A-25/1	2CSB204101R5250	809302			0.200	1
		40	DDA204 A-40/1	2CSB204101R5400	809401			0.200	1
		63 ③	DDA204 A-63/1	2CSB204101R5630	799207			0.350	1

- ① available in the version fitting in 4 modules
② version with test button working at 115 VAC-127 VAC is available on request
③ provided with additional terminals for remote tripping